
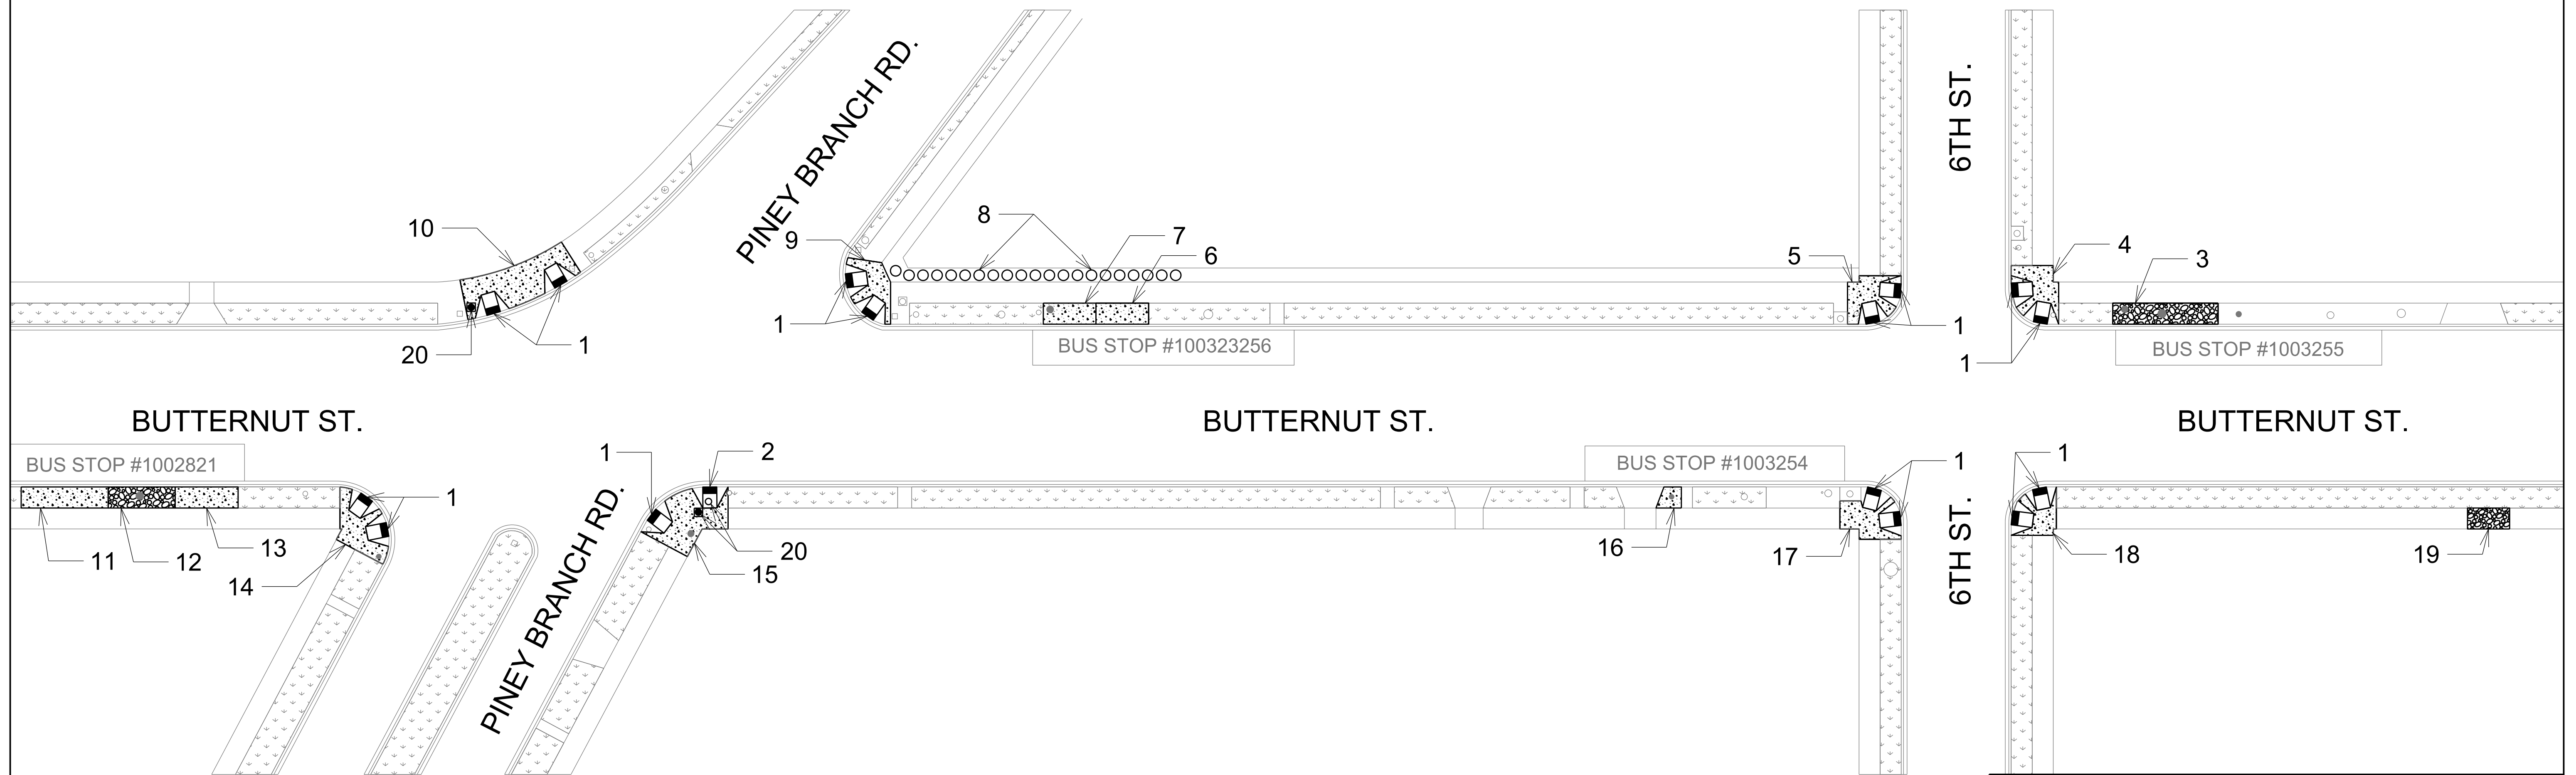


CONSTRUCTION NOTES:

1. REMOVE AND REPLACE RAMP
2. NEW RAMP
3. ADD POROUS FLEXIBLE PAVING, 30' X 6'
4. REPAIR AND REPLACE PCC SIDEWALK, 17' X 12'
5. REPAIR AND REPLACE PCC SIDEWALK, 15' X 12'
6. ADD PCC SIDEWALK, 15' X 6'
7. REPAIR AND REPLACE PCC SIDEWALK, 15' X 6'
8. TRIM SHRUBS
9. REPAIR AND REPLACE PCC SIDEWALK, 13' X 12'
10. REPAIR AND REPLACE PCC SIDEWALK, 33' X 12'
11. REPAIR AND REPLACE PCC SIDEWALK, 25' X 6'
12. ADD POROUS FLEXIBLE PAVING, 19' X 6'

13. REPAIR AND REPLACE PCC SIDEWALK, 18' X 6'
14. REPAIR AND REPLACE PCC SIDEWALK, 16' X 9'
15. REPAIR AND REPLACE PCC SIDEWALK, 21' X 12'
16. ADD PCC SIDEWALK, 7.5' X 6'
17. REPAIR AND REPLACE PCC SIDEWALK, 15' X 12'
18. REPAIR AND REPLACE PCC SIDEWALK, 13' X 12'
19. ADD POROUS FLEXIBLE PAVING, 12' X 6'
20. ADJUST MANHOLE FRAME

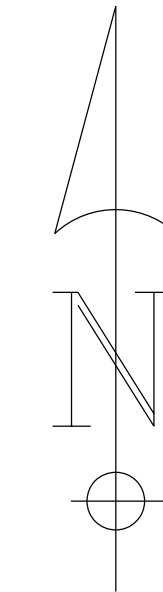

LEGEND		PCC SIDEWALK
		BRICK SIDEWALK
		GRASS
		EXISTING CONDITIONS
		PROPOSED CONDITIONS
		DETECTABLE WARNING SURFACE

The Temple Group, Inc.
 1120 Connecticut Avenue, NW
 Suite 310
 Washington, DC 20036
 Ph.: 202-822-6600
 Fax: 202-822-6603
 www.thetemplegroup.com

No.	DESCRIPTION	NAME	DATE
REVISIONS			

DISTRICT OF COLUMBIA
DEPARTMENT OF TRANSPORTATION
 INFRASTRUCTURE PROJECT MANAGEMENT ADMINISTRATION

CITY-WIDE AMERICANS WITH DISABILITIES ACT COMPLIANCE
 DCKA-2011-C-0059

PROJECT ENG. <u>AK</u>
DESIGN BY <u>AK</u>
CHECKED BY <u>AK</u>
DRAWN BY <u>VMD</u>
FILE _____
DATE _____
SHEET 01 OF 01
DWG NO. _____

BUTTERNUT ST. FROM PINEY BRANCH RD. TO 6TH ST., NW
 BUS STOP #1002821, 1003255, 1003256, 1003254