
PRODUCT DATA SHEET



PRODUCT: Flexi-Stone

MIX DESIGN: FS2000 & FSX2000



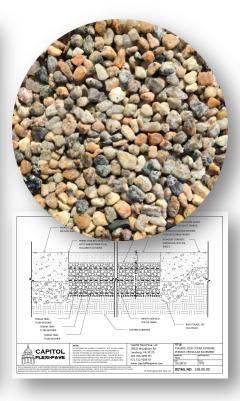

FS2000 FLEXI-STONE & FSX2000 FLEXI-STONE

Flexi-Stone is our heavy duty porous paving solution made for vehicular and pedestrian traffic. It is made from a 1.5 inch layer of HD1500 covered by a ½ layer of architectural aggregate. The aggregate is available in 49 base colors and 2,401 blended colors. This porous pavement system is capable of swallowing over 3,500 gallons of water per square foot per hour. FS2000 is the pedestrian version of this pavement and FSX2000 is the vehicular version. The X in FSX2000 stands for an additional urethane overspray that helps maintain the best possible surface integrity against power steering scuff potential. It is recommended annually in vehicular applications. Neither product requires vacuuming, as both are considered self-cleaning due to the dynamic pore capacity inherent in their design. The 4 to 8 inch deep stone base is made of AASHTO #57 stone or equivalent Recycled Concrete RC-57. Geotextile Fabric and GeoGrid are also typically added to the base to reinforce it against heavier loads.

PRODUCT CHARACTERISTICS

- DURABLE STONE SURFACE
- INVISIBLE TO STORMWATER
- ELIMINATES WATER RUNOFF
- RECYCLED PAVING CONTENTS
- RECYCLED BASE MATERIAL
- RESISTANT TO FREEZE/THAW
- RESISTANT TO DEICERS
- RESISTANT TO CHEMICALS
- LOW COEFFICIENT OF FRICTION
- YEAR ROUND INSTALLATIONS
- 49 BASE COLORS
- 2,401 BLENDED COLORS
- ELIMINATES ORTHOPHOSPHATES
 & NITRATES